LALIZAS LifeSaving

PRODUCT DATA SHEET

Lifebuoy Rings


Fitted with SOLAS Retroreflective Tape



Hard, cross - linked polyethylene outer shell that will not deteriorate and will remain unaffected by extreme weather conditions.

SPECIFICATIONS

Code	70090	70110	700901	701101
Approval	SOLAS/MED-MER/TC		USCG SOLAS	
Weight (kg)	2.5	4	2.5	4
Drop Height (m)	80		80	
Buoyancy	≥ 145 Nt			
Lifebuoy shell / Internal material	HDPE / PU Foam			
Grab line material	PE			
Grab line diameter	9,5		11	
Highly visible colour	YES			
Storage temperature	-30°C up to + 65°C			
Resistant to flame & to diesel oil	YES			
Tested for operation with light & smoke signal	-	YES	-	YES
External/Internal diameter	730 ± 15 mm / 440 ± 10 mm			
Height	90 +15 mm -5 mm			

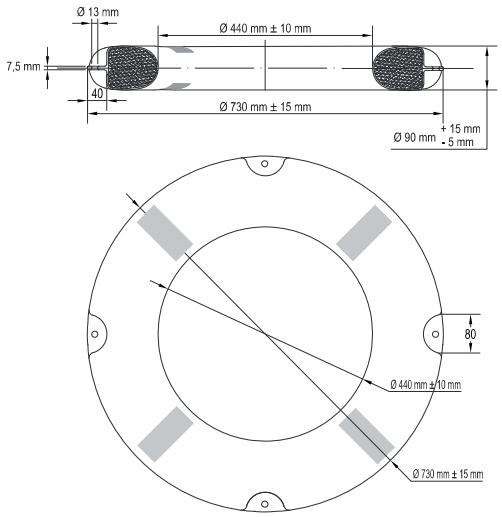

Combine with



Plastic Holder for Lifebuoy Ring, Set of 3pcs

Code | 01107



CABO Floating Line, Orange

Codes

94801 | 70260



LALIZAS Lifebuoy Light SOLAS/MED/ USCG

Code | 71325



LALIZAS Lifebuoy Light SOLAS/MED/ USCG - ATEX/IECEx

Code | 71326



LALIZAS Lifebuoy Light M.O.B SOLAS/ MED/USCG

Code | 70030



LALIZAS Lifebuoy LED Light STELLA, SOLAS/MED

Code | 196482

12.26.06.4